

SensoMAG F10 Temperature Fire Alarm Detector

EN54-5



Description

SensoMAG F10 is a fixed temperature detector with digital processing algorithm. The detector is designed to detect temperatures above 60°C (class A2S, according EN54-5).
SensoMAG F10 is suitable for installing in any conventional fire alarm system designed with fire alarm panel with fire alarm threshold between 10mA and 15mA.



Technical and Environmental Specifications


Operating Voltage Range 9 - 30 V DC (Nom. 12/24VDC)
Average current consumption in quiescent state . . < 50µA
Alarm state current:
- with base type B24 and B24D 20 mA / 12 30V
- with base type B24RD 33 mA / 12V; 49mA/24V; 57mA/30V
- with base type B12 18 mA / 9V; 29mA/12V; 32mA/15V
Class (in accordance with EN54-5) A2/S
Protected area (in accordance with EN54-5) . . . up 35m²
Installation height (in accordance with EN54-5) . . up 3,5m
Output in alarm state at terminal RI 20mA (max)/ -3.3V
(Towards terminals +IN /+OUT)
Degree of protection IP30
Wire Gauge for terminals 0.4mm² 2.0mm²
Operational temperature range -10°C +60°C
Relative humidity resistance (93 ± 3)% @ 40°C
Dimensions (incl. base) ø102mm, h 42mm
Weight (incl. base) 160g



1293-CPD-0117

Application

SensoMAG F10 is suitable for environments, where sudden large temperature changes are considered as normal, rooms with high concentration of vaporous, exhaust gases, dust, etc.
For example: kitchens, garages, boiler rooms or other places where it is not convenient to install fire alarm optical smoke detectors.

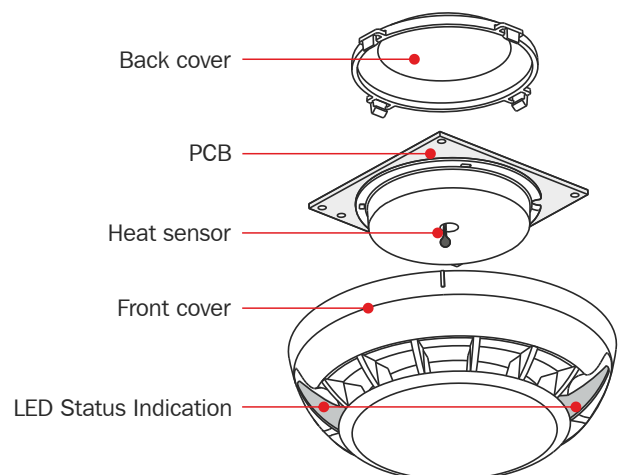


Contact Information:

SensoMAG F10 Temperature Fire Alarm Detector


EN54-5

Packing Information

• **Master box** - 10 units SensoMAG F10, no bases included, dimensions 335 x 109 x 109 mm.
All detectors are protected with a plastic cap.

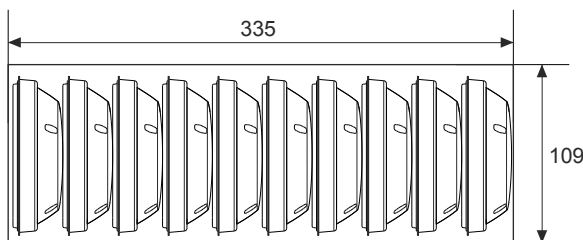

• **Carton box** - 100 units SensoMAG F10 (10 master boxes), no bases included, dimensions 556 x 345 x 231 mm.
All detectors are protected with a plastic cap.

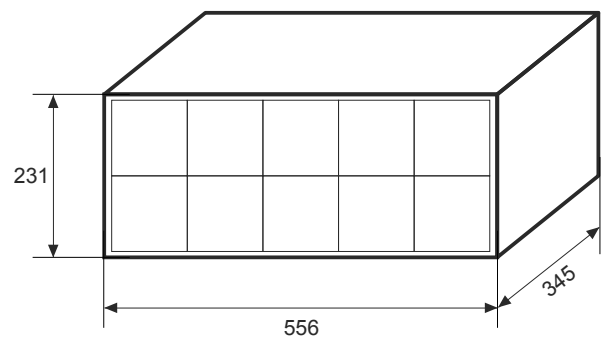

Compatible Product Range

- **MAG2M, MAG2P** - Conventional Fire Alarm Panel, 2 fixed zones
- **MAG4M, MAG4P** - Conventional Fire Alarm Panel, 4 fixed zones
- **MAG8** - Conventional Fire Alarm Panel, 8 fixed zones
- **MAG8plus** - Conventional Fire Alarm Panel, 8 fixed zones, expandable to 16
- **SensoMAG FRL-1** - Remote Fire Indicator
- **SensoMAG B24** - Standard Base
- **SensoMAG B24D** - Standard Base with Schottky diode
- **SensoMAG B24RD** - Standard Base with Schottky diode and increased alarm state current
- **SensoMAG B12** - Base with relay output, 12V
- **Deep Base** - Accessory for mounting on rough surfaces, outdoor pipelines, etc.

Contact Information: