

SpeedFace -H5

3-in-1 Starter Facial Recognition Terminal with 5-inch Touch Display











Proactive Facial Recognition

New Height of Anti-Spoofing

ofing Recog


Wide Pose Angle Acceptance

louchless for Better Hygiene



- Enhanced Visible Light Facial Recognitoin with Deep Learning built-in
- 3-in-1 verification with Fingerprint, RFID and Facial Recognition
- 5-inch touch LCD
- \cdot Dual-camera for real-time face detection
- 6,000 face template capacity

- Recognition distance: 0.3 3 m
- Compatible with external RS232, RS485 and Wiegand reader
- TCP / IP, Wi-Fi communication

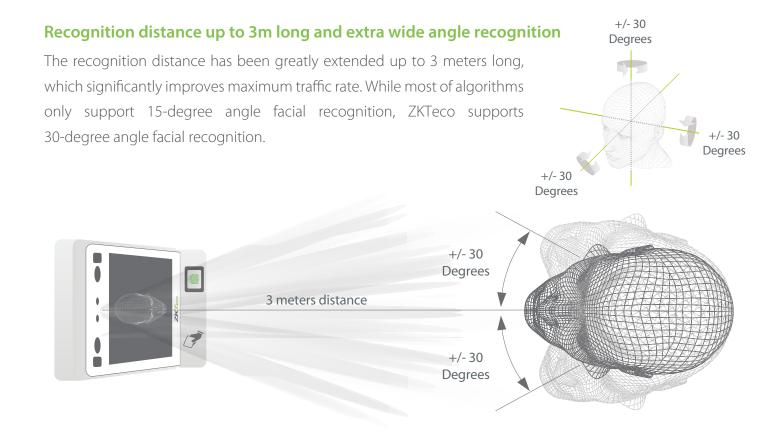



Specifications

Model		SpeedFace-H5
Hardware	LCD	5-inch touch screen
	CPU	Quad-core A17 1.8GHz
	Memory	2G RAM / 16G ROM
	Camera	2MP dual lens
	Communication	TCP / IP, Wi-Fi (optional) RS232, RS485 for external reader Wiegand Input/Output
	Accessory	Door lock, door sensor, alarm, exit button and auxiliary input
	Audio	Loudspeaker
Capacity	Users	10,000
	Face Template	6,000
	Fingerprint	10,000
	RFID	10,000
	Log	200,000
Operating	Voltage	12V 3A
	Temperature	-10°C ~ 45°C
	Humidity	10% ~ 90%
Software		ZKBioAccess

Optional Accessories



RS485 Fingerprint Reader



RFID Reader



Electric Lock



-

Alarm




Exit Button



Sensor

Dimensions (mm)





Copyright©2018 ZKTECO CO., LTD. All rights reserved.