

## DS-3E0105P-E/M PoE Switch




### Overview

DS-3E0105P-E/M PoE switch provides five 100 Mbps Ethernet ports, and ports 1 to 4 of the switch can identify and supply power to PoE powered devices compliant with IEEE 802.3af standard automatically via Ethernet cables. The maximum output PoE power of a single port is 15.4 W and the entire switch is 35 W. Additionally, the switch is also equipped with plug and play function, making it the perfect choice for hotels, schools, factory dormitories and SMEs to have cost-effective PoE network.

### Model

Model	Description
DS-3E0105P-E/M	100 Mbps PoE Switch

### Dimension

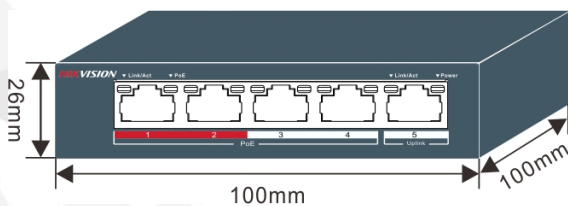


### Features

- Ports 1 to 4 support IEEE 802.3af standard.
- When the switch is in **EXTEND** mode and the data rate is 10 Mbps, ports 1 to 4 support long-distance data transmission up to 250 meters.
- All ports support 6 kV lightning protection.
- This switch supports Auto MDI/MDIX.
- This switch supports store-and-forward.
- This switch supports MAC address auto learning and auto aging.
- This switch supports smart cache optimization.
- This switch supports desktop / wall mounting.



## Application Scenario

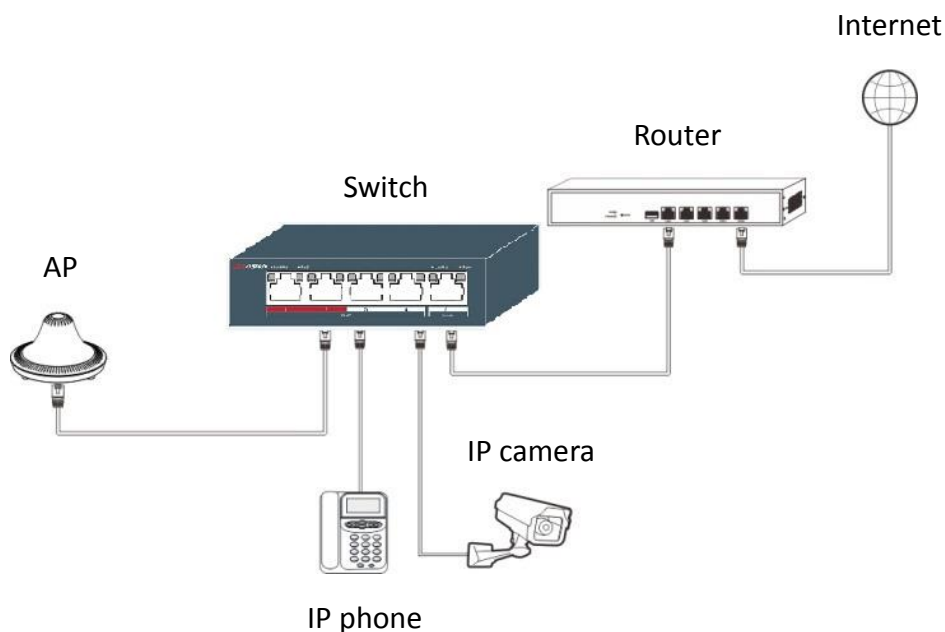

Distributed by



### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com

## Specifications

Model	DS-3E0105P-E/M
<b>Port</b>	
Port amount	5
Port type	RJ45, 10/100 Base-T(X)
Standard	IEEE 802.3, IEEE 802.3u, IEEE 802.3x
Forwarding method	Store-and-forward
Flow control	Back-pressure flow control in IEEE 802.3x full duplex
Priority queue	2
MAC address table	1 K
QoS	Supported on ports 1 and 2.
Switching capacity	1 Gbps
Packet forwarding rate	0.744 Mpps
<b>Physical appearance/structure</b>	
Appearance	0.6 mm sheet of galvanized metal without electric fan
Weight	0.141 kg
Dimension	100 mm × 100 mm × 26 mm
Mounting type	Desktop / wall mounting
<b>Environment</b>	
Operating temperature	(0 - 40) °C
Storage temperature	(-40 - 70) °C
Operating humidity	(10 – 90) % RH, non-condensing
Storage humidity	(5 – 90) % RH, non-condensing
<b>Power supply</b>	
Power input	48 V DC, 0.8 A
Reverse connection protection	Supported
Power consumption	< 38 W
<b>Other parameters</b>	
LED indicator	Link/Act LED indicators, PoE LED indicator, Power LED indicator

Distributed by

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com